


# Rubber Fab

a Garlock Hygienic Technologies company

## RFPVW

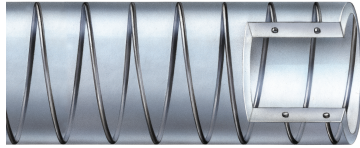

*Smoothbore FDA PVC Hose with Wire Reinforcement*

**TUBE:** Smoothbore FDA PVC

**COVER:** Smoothbore FDA PVC

**REINFORCEMENT:** Steel wire reinforcement

**COLOR:** Transparent

**TEMPERATURE:** 25°F to 150°F

Part Number	Hose ID Inch	Hose OD Inch	Bend Radius Inch	Max. Working Pressure @ 70°F psig	Vacuum Rating @ 70°F in. Hg.	Weight Per Foot
04RFPVW	0.25	0.46	1.00	150	FULL	0.07
06RFPVW	0.38	0.60	1.50	100	FULL	0.11
08RFPVW	0.50	0.75	2.00	100	FULL	0.15
10RFPVW	0.63	0.89	2.50	50	FULL	0.19
12RFPVW	0.75	1.03	3.00	70	FULL	0.24
16RFPVW	1.00	1.30	4.00	100	FULL	0.44
20RFPVW*	1.25	1.61	5.00	70	FULL	0.50
24RFPVW	1.50	1.86	6.00	50	FULL	0.58
32RFPVW	2.00	2.39	8.00	50	FULL	0.84
36RFPVW*	2.25	2.75	9.00	50	FULL	1.16
40RFPVW	2.50	3.00	10.00	50	FULL	1.38
48RFPVW	3.00	3.50	12.00	50	FULL	1.62

\* Bulk hose only.

### Features

- Clear and flexible
- Will not impart taste or odor
- Non-toxic
- Non-pyrogenic
- Alkaline resistant
- Available in bulk or fabricated assemblies
- Static grounding available

### Applications

- Chemical processing and transfer
- Pharmaceutical manufacturing
- Food and syrup handling
- Beverage transfer
- Dairy processing
- Air lines
- Laboratory and research
- Instrumentation
- General water suction and discharge
- Irrigation systems
- Hydraulics and pneumatics

### Hose Certifications

- USP Class VI
- FDA CFR Title 21 170-199
- 3-A Sanitary Standards
- NSF/ANSI STD 51
- RoHS
- USDA
- Phthalate Free



26 Brookfield Drive • Sparta, New Jersey 07871

973.579.2959 • 866-442-2959 Toll Free • 973.579.7275 Fax • www.rubberfab.com