


# Rubber Fab

a Garlock Hygienic Technologies company

## RFSG

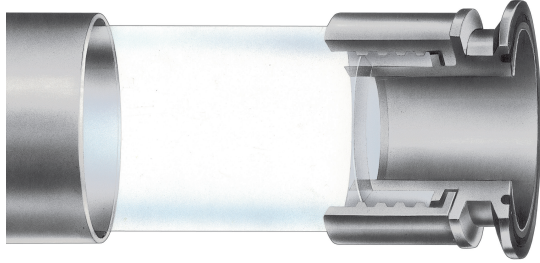

*Non-Caged FEP Sight Gauge*

**TEMPERATURE:** -25°F to 300°F

**END CONNECTIONS:** 316L stainless steel sanitary Tri-Clamp®  
Consult factory for other end connection options

| Part Number | Hose ID Inch | Hose OD Inch | Wall Thickness | Max. Working Pressure @ 70°F |
|-------------|--------------|--------------|----------------|------------------------------|
| 08RFSG      | 0.50         | 0.75         | 0.125          | 150 psi                      |
| 12RFSG      | 0.75         | 1.00         | 0.125          | 130 psi                      |
| 16RFSG      | 1.00         | 1.25         | 0.125          | 125 psi                      |
| 24RFSG      | 1.50         | 1.75         | 0.125          | 105 psi                      |
| 32RFSG      | 2.00         | 2.35         | 0.175          | 72 psi                       |
| 40RFSG      | 2.37         | 2.65         | 0.140          | 50 psi                       |
| 48RFSG      | 2.87         | 3.23         | 0.180          | 40 psi                       |

**Note:**

ID is nominal bore only. Consult factory for fitting ID dimension.  
Rubber Fab recommends a Rubber Fab factory crimp for this product.

### Features

- Liquid level indicators
- Sturdy, favorable in high stress applications
- High and low temperature rated
- Smooth, non-stick surface cleans easily and promotes minimal pressure drop
- Non-contaminating
- Will not impart taste or odor
- Shatterproof tube
- Will not discolor
- Unaffected by ultraviolet or sunlight

### Certifications

- 3-A Sanitary Standards
- USDA
- FDA
- USP Class VI



26 Brookfield Drive • Sparta, New Jersey 07871

973.579.2959 • 866-442-2959 Toll Free • 973.579.7275 Fax • [www.rubberfab.com](http://www.rubberfab.com)