


Rubber Fab

An ENPRO Company

RFSFM SUPREME-FLEX MAX™

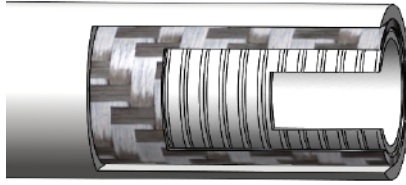

Smoothbore PTFE Lined Hose with Stainless Steel Wire Braid and Silicone Outer Cover

TUBE: Seamless white PTFE

COVER: White silicone

REINFORCEMENT: Stainless steel wire braid

TEMPERATURE: -40°F to 300°F

Part Number	Hose ID Inch	Hose OD Inch	Bend Radius Inch	Max. Working Pressure @ 68°F PSI	Vacuum Rating @ 70°F in. Hg.	Weight Per Foot
08RFSFM	0.50	0.71	1.50	870.2	FULL	0.28
12RFSFM	0.75	1.19	1.97	870.2	FULL	0.41
16RFSFM	1.00	1.47	2.76	725.2	FULL	0.64
24RFSFM	1.50	1.81	5.51	580.2	FULL	1.56
32RFSFM	2.00	2.29	7.87	420.0	FULL	1.91

Features

- Superior flexibility
- High pressure rating
- Lining is smoothbore PTFE
- Excellent chemical resistance
- Full Traceability
- Suitable for sterilization by autoclave and gamma irradiation
- Steam cleanable at stated temperature and pressure rating
- Vacuum rating: 0.9 bar up to 400°F/204°C
- Will not impart taste or odor
- Ultra smooth bacteria free tube

Applications

- Load cell
- CIP/SIP cleaning
- Filling equipment
- Sampling systems
- Fermentation lines
- Food and beverage processing
- Pharmaceutical processing
- Chemical transfer
- Sanitary transfer

Hose Certifications

- USP CLASS VI
- FDA 21 CFR 177.1550 OF CORE MATERIAL
- EU 10/2011
- REGULATION 1935/2004

26 Brookfield Drive • Sparta, New Jersey 07871

973.579.2959 • 866-442-2959 Toll Free • 973.579.7275 Fax • www.rubberfab.com