


# Rubber Fab

a Garlock Hygienic Technologies company

## RFST – FLARE THRU

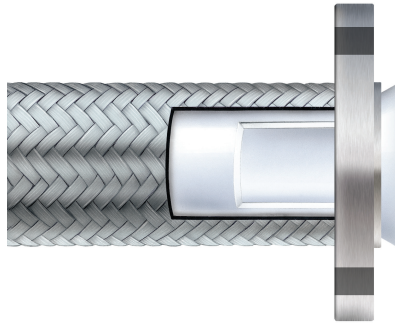

Part Number	Hose ID Inch	Hose OD Inch	Bend Radius Inch	Max. Working Pressure @ 70°F psig	Vacuum Rating @ 70°F in. Hg.	Weight Per Foot
12RFSTFT*	0.75	0.88	8.20	275	FULL	0.20
16RFSTFT	1.00	1.19	12.00	275	FULL	0.50

\*Available in 150# flange style only.

*Smoothbore Flared PTFE Lined  
Hose with Stainless Steel Braided Cover*

**TUBE:** Seamless white PTFE

**COVER:** Braided stainless steel

**TEMPERATURE:** -20°F to 350°F

**AVAILABLE:** Flare thru Tri-Clamp®

**FITTINGS:** Flare thru 150# flange

### Features

- Outer cover is stainless steel braid overwrap
- Smoothbore PTFE inner core
- No bacteria traps with flare thru assembly
- Non-stick contact surface will not contaminate product
- Withstands high velocity and pressure surges
- Resists moisture
- Autoclavable

### Applications

- Food and beverage processing
- Pharmaceutical processing
- Cosmetics
- Hot CIP solutions
- Chemical products
- Low pressure steam

### Hose Certifications

- USP Class VI
- FDA 21 CFR 177.1550
- USDA

26 Brookfield Drive • Sparta, New Jersey 07871

973.579.2959 • 866-442-2959 Toll Free • 973.579.7275 Fax • [www.rubberfab.com](http://www.rubberfab.com)